



CORRUGATED LEAD



USAGE

To ensure the watertightness of all ridge and rafter tiles for dry mortarless construction.

SUBSTRATE

On riser block.


FASTENING

Maintained in position on the wood, by the ridge or rafter tile, which is fastened by a nail or a hook.



LEAD THICKNESS 0.50 mm

Length ml	DIMENSIONS		WEIGHT (KG)		PACKAGING
	Width mm	Theoretical/Part	By Pallet		
5	200	6	100 strips		PLPB0050050000200
5	250	8	100 strips		PLPB0050050000250
5	300	9	100 strips		PLPB0050050000300
5	330	10	100 strips		PLPB0050050000330
5	400	12.5	100 strips		PLPB0050050000400

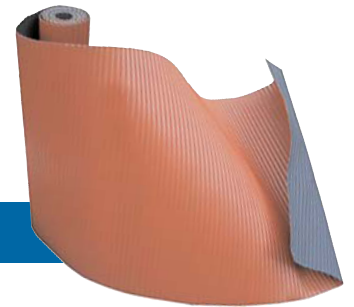

COLOUR LEAD



LEAD THICKNESS 0.50 mm

Length ml	DIMENSIONS		WEIGHT (KG)		PACKAGING
	Width mm	Theoretical/Part	By Pallet		
5	330	11	50 strips		PRPB0050050000330
5	400	13	50 strips		PRPB0050050000400
5	500	16	50 strips		PRPB0050050000500



LE
PLOMB
FRANÇAIS®

Ask for other dimensions